

trades on 16 October 2024	34,042
average trading rate	1.4 per second
presample for the diurnal profile	17 to 30 September 2024
outliers on 16 October 2024, o	1,415 (4.16%)
price half-life: run / minimizer ¹	3.0 / 2.8 trades
cost of running 3 trades	+0.33%
scale half-life: run / minimizer ²	240 / 240 s
cost of running 240 s	+0.00%
direction half-life ³	88 s [73, 111]
Mandelbrot a minimizing QLIKE	26 trades
a within 0.0005 of the minimum	18 to 39
linear $\hat{\sigma}$, before $\rightarrow$ at the largest residual ⁴	9% $\rightarrow$ 37%
Huber $\hat{\sigma}$, before $\rightarrow$ peak	9% $\rightarrow$ 11%
median spot volatility, Huber / linear input ⁵	11.1 / 11.3 %
hyperbolic against HExp, correlation of logs	0.9990
HExp QLIKE advantage, leave-one-day-out ⁶	+0.01326
15-minute signature level	14 to 23 %
Huber signature, 1 min over 1 s, 12 day average	1.25

AMGN over the 12 trading days 1 to 16 October 2024, and on 16 October 2024. ¹the median over k from 2 to 100 of the half-life minimizing the k -trade-ahead Huber forecast loss, and the largest cost over those k of running the common 3 trades. ²the 1-minute-ahead check loss of the noise scale. ³the half-life maximizing the mean predictive log-likelihood per scored trade on 16 October 2024, with the range within 10^{-4} of the maximum. ⁴the largest Huber residual after 09:45, at 12:56; before is the median over $t^* - 15$ to $t^* - 3$ minutes and at is the maximum over $t^* - 6$ to $t^* + 12$ minutes. ⁵over the 12 days, sampled every 300 trades. ⁶hyperbolic minus HExp, so positive favours HExp.

k	Mean of $ \hat{X}_t - \hat{X}_{t-k} /\sqrt{k}$ in cents				Sqrt of Mean of $(\hat{X}_t - \hat{X}_{t-k})^2/k$ in cents			
	median	Huber	linear	trades	median	Huber	linear	trades
1	1.074	0.870	0.865	4.074	2.677	1.424	1.471	8.572
2	1.015	0.949	0.967	3.318	2.351	1.511	1.551	6.417
5	1.127	1.024	1.048	2.450	2.156	1.606	1.623	4.353
10	1.146	1.041	1.056	1.950	1.924	1.588	1.602	3.273
25	1.106	1.025	1.031	1.511	1.657	1.493	1.502	2.330
k	ACF of $\hat{X}_t - \hat{X}_{t-1}$ at lag k				Hill tail index of $ \hat{X}_t - \hat{X}_{t-k} $			
	median	Huber	linear	trades	median	Huber	linear	trades
1	-0.23	0.13	0.11	-0.44	3.05	2.47	2.82	2.98
2	0.07	0.05	0.03	-0.03	3.10	2.71	2.60	2.81
5	0.00	-0.01	-0.02	-0.01	2.86	2.77	2.62	2.75
10	-0.01	-0.01	-0.02	0.00	3.00	3.08	3.00	2.68
25	0.01	0.01	0.01	0.02	3.55	3.37	3.48	3.05

Table 1: Trade-lag differences, **AMGN**, 16 October 2024.

s	Mean of $\frac{ \hat{X}_t - \hat{X}_{t,s} }{\sqrt{\tau_t - \tau_{t,s}}}$ in cents				Annualized volatility: $\hat{\sigma}_{\text{Annual};s}$			
	median	Huber	linear	trades	median	Huber	linear	trades
0.1 s	4.90	4.37	4.36	8.95	17.0	10.5	11.6	68.4
1 s	3.45	3.21	3.24	5.89	15.0	10.4	11.4	54.3
5 s	2.53	2.37	2.40	3.79	15.0	12.3	12.8	36.1
10 s	2.29	2.16	2.18	3.15	14.4	12.9	13.3	28.8
1 min	1.73	1.67	1.68	2.06	13.7	13.3	13.4	17.9
15 min	2.05	2.04	2.06	2.14	15.5	15.5	15.6	17.2
s	Cor($\hat{X}_t - \hat{X}_{t,s}, \hat{X}_{t,s} - \hat{X}_{t,2s}$)				Hill tail index of $ \hat{X}_t - \hat{X}_{t,s} $			
	median	Huber	linear	trades	median	Huber	linear	trades
0.1 s	-0.07	0.01	0.03	-0.09	3.30	4.04	4.32	3.54
1 s	-0.06	-0.01	-0.02	-0.31	3.69	4.21	4.35	3.08
5 s	-0.11	-0.05	-0.06	-0.37	3.80	4.40	4.65	3.32
10 s	-0.08	-0.03	-0.05	-0.38	4.10	5.01	5.16	2.67
1 min	0.01	0.04	0.04	-0.12				

Table 2: Clock-lag differences, **AMGN**, 16 October 2024.

	median	Huber	linear
Mean of $ \hat{\epsilon}_t $ in cents	2.67	3.22	3.32
s.d. of $\hat{\epsilon}_t$ in cents	6.14	5.79	5.64
Tail index of $\psi(\hat{\epsilon}_t)$	∞	∞	2.84
ACF of $\psi(\hat{\epsilon}_t)$, lag 1	0.19	0.17	0.11
ACF of $\psi(\hat{\epsilon}_t)$, lag 2	0.05	0.06	0.03
ACF of $\psi(\hat{\epsilon}_t)$, lag 5	0.00	0.00	-0.02
ACF of $\psi(\hat{\epsilon}_t)$, lag 10	0.00	-0.01	-0.02
ACF of $\psi(\hat{\epsilon}_t)$, lag 25	0.02	0.00	0.01
80% C.I. for $\theta_t - X_t$	—	-2.06,2.00	-2.19,2.10
95% C.I. for $\theta_t - X_t$	—	-3.64,3.68	-3.91,3.92
99% C.I. for $\theta_t - X_t$	—	-6.19,5.91	-6.66,6.52
s.e. of $\theta_t - X_t$ in cents	—	1.82	2.07

Table 3: Residual summaries, **AMGN**, 16 October 2024. Median C.I. and s.e. cells are omitted (price discreteness); the linear s.e. is printed because the Hill index of its score, 2.84, is above two.

	16 October 2024		12 days, min to max	
	upper	lower	upper	lower
All trades (as in the paper)	3.68	2.44	2.18 to 3.81	2.44 to 4.10
Residual divided by δ_t	2.92	2.63	2.87 to 4.29	2.15 to 3.49
Repricing windows removed	3.80	2.79	2.60 to 3.91	2.39 to 4.05
Calm windows only	4.01	2.98		
Every 10th trade	3.63	3.48	2.17 to 3.63	1.75 to 3.64
Six-trade half-life	4.10	2.37	2.15 to 4.10	2.37 to 4.38

Table 4: Hill estimator of the tail index of the Huber filter residual, **AMGN**, 12 analysis days. The index is the mean of Hill estimates over the largest 0.1% to 1% of residuals, each tail separately, which for this stock is an average over 13 to 14 depths a day in row 1; the masked and thinned rows use fewer. Second row: divides the residual by its own threshold δ_t . Third row: drops trades where the filtered price moves more than 6.8 times the day’s median δ_t within ± 1 second, which is 60.5 to 81.3 cents over the days and removes 0% to 2% of a day; the fourth keeps only trades where it moves less than 3.4 times that median within ± 5 seconds, 30.2 cents on 16 October 2024, 97% of that day. Fifth row: keeps every 10th trade. Sixth row: doubles the filter’s half-life with the thresholds held fixed. The ranges run over the days on which the row can be estimated.

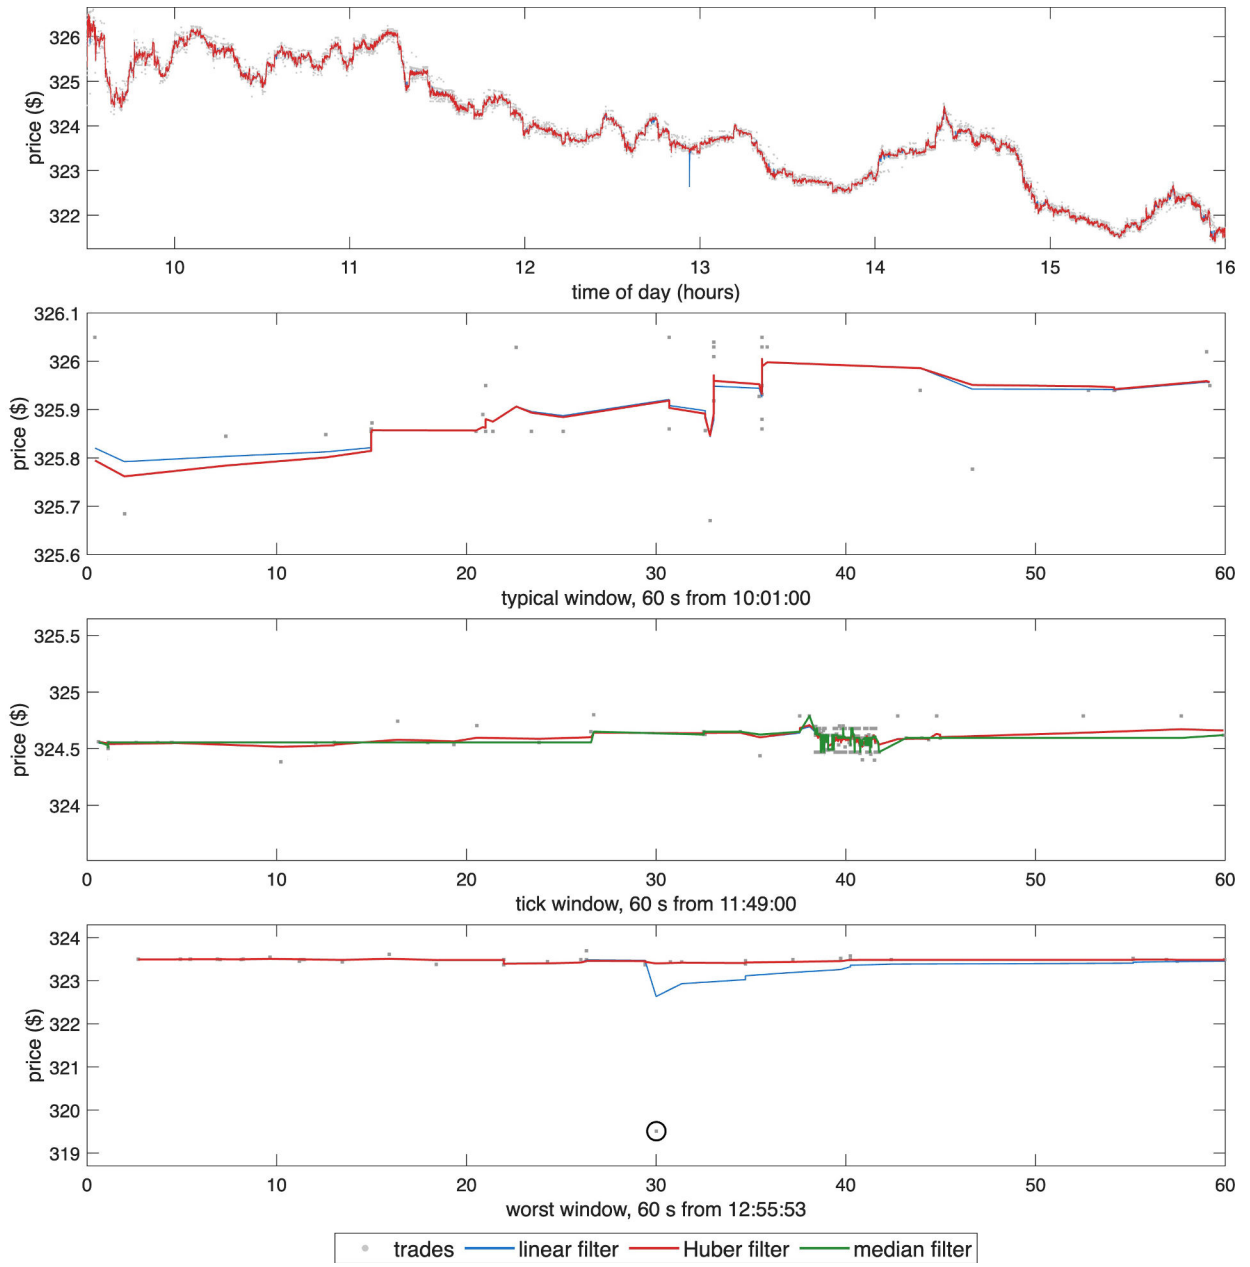


Figure 1: AMGN trades (grey points), the linear filter and the Huber filter, 16 October 2024. Top: full trading day. 2nd: 60-second window at the day's median trade count, from 10:01:00. 3rd: 60-second window at 11:49:00 in which the price reverses direction most often, with the median filter m_t added. Bottom: 60-second window around the largest Huber residual after 09:45, circled.

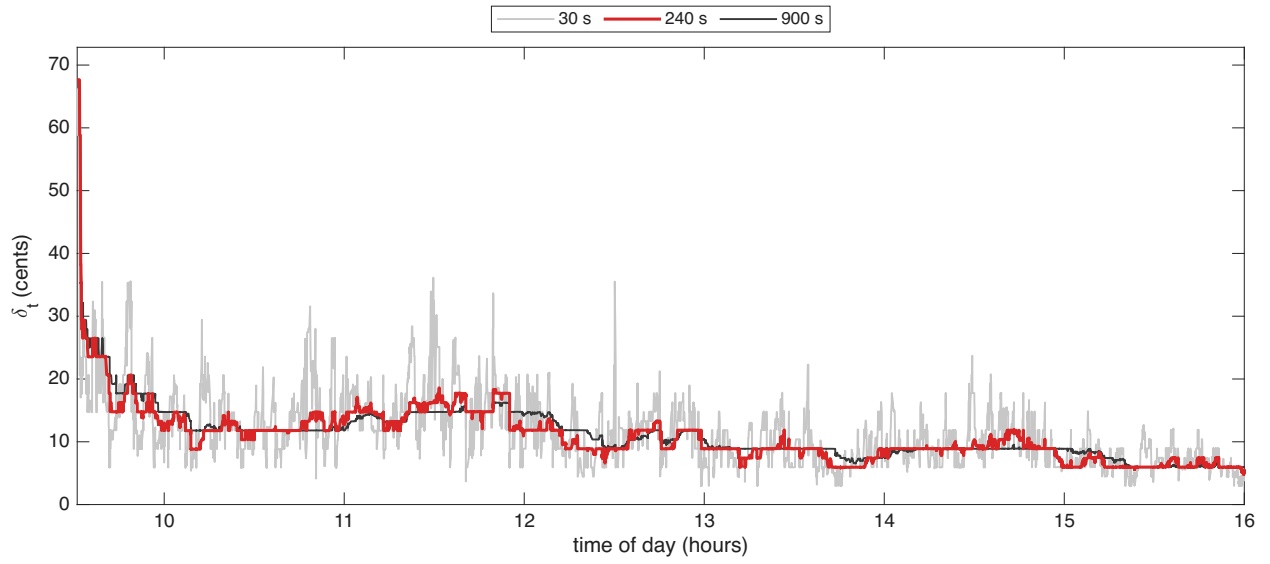


Figure 2: The Huber threshold δ_t in cents for AMGN on 16 October 2024, with half-lives of 30, 240, 900 seconds. The 240-second half-life, in red, is used.

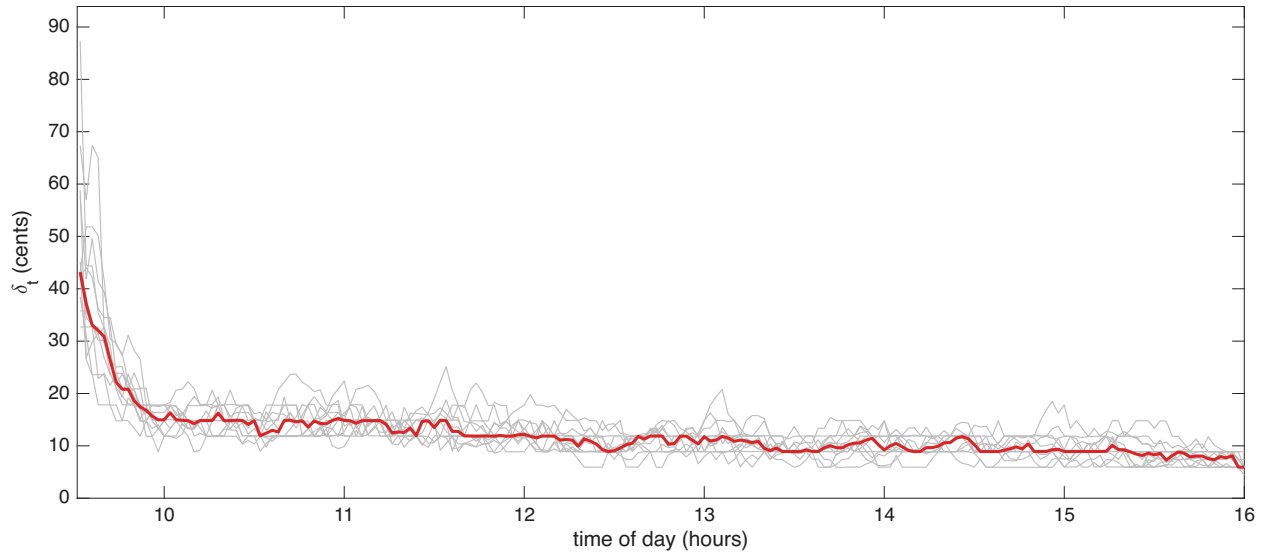


Figure 3: Huber threshold δ_t in cents through the trading day, for 12 AMGN trading days in Oct 2024 (grey lines) and their median (red line).

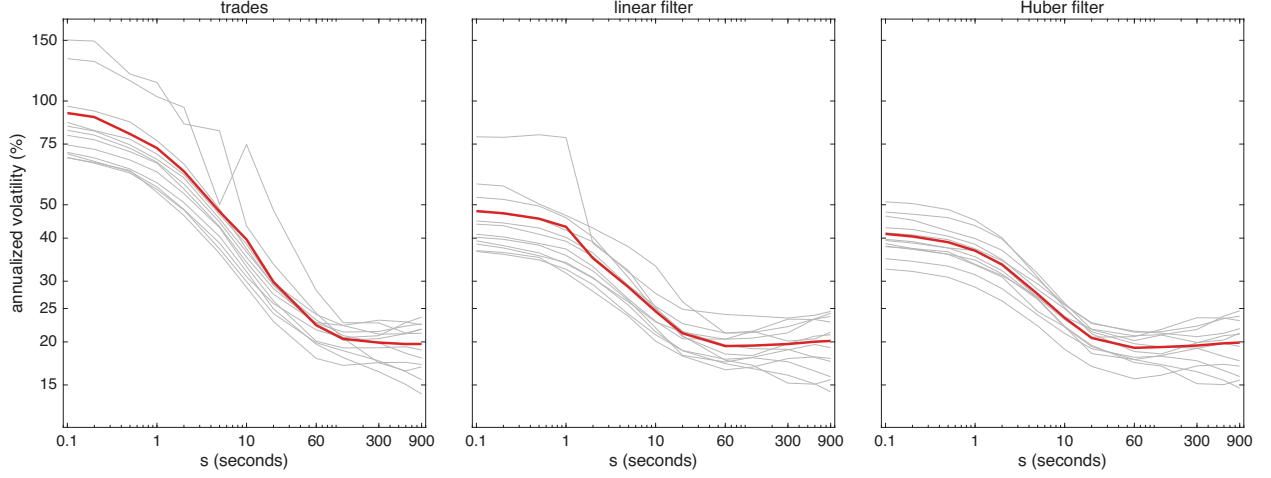


Figure 4: Volatility signature curves for **AMGN** over the 12 trading days in Oct 2024. The annualized vol $\hat{\sigma}100\sqrt{252}$ from the returns $\hat{X}_t - \hat{X}_{t,s}$ of Table 2, against the lag s in seconds, both axes on log scales, for: raw trades, linear filter & Huber filter. Grey lines are the individual trading days & the red line is the square root of the 12 day average of their squares. The linear & Huber returns carry the finite-sample correction $c_{t,s}$ of the paper; the raw trades are unaffected by it.

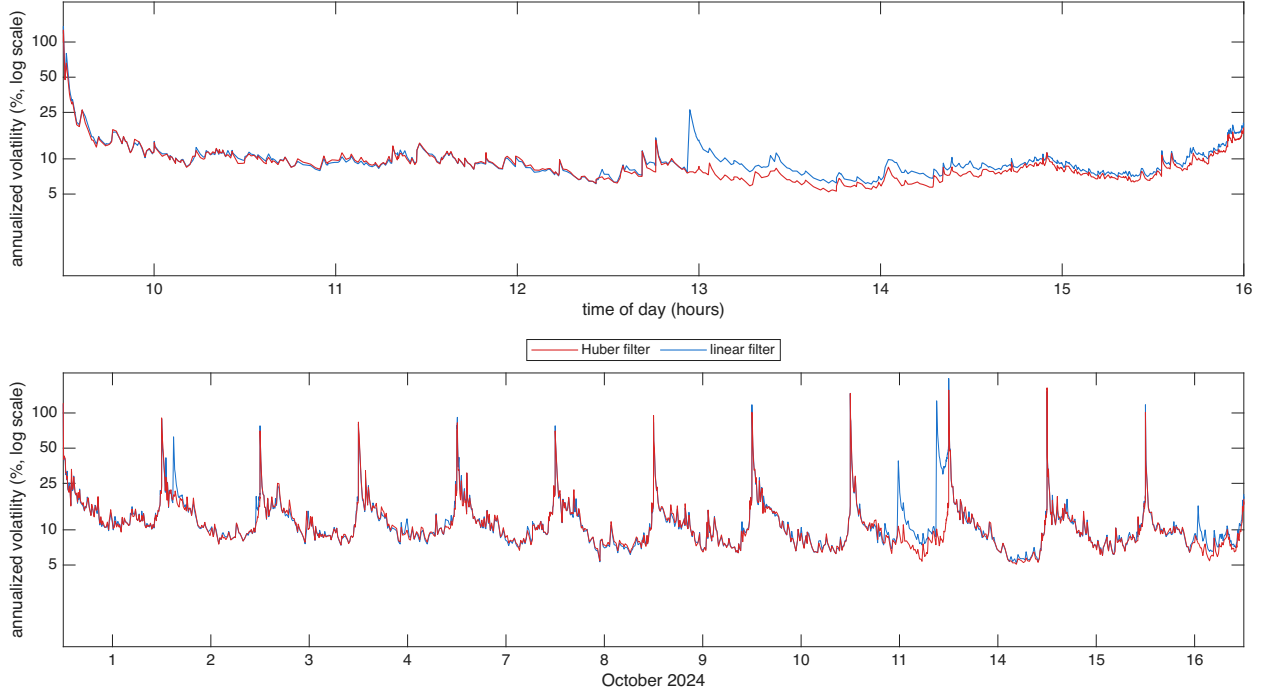


Figure 5: Filtered spot volatility for **AMGN** over 12 trading days in Oct 2024, the diurnally adjusted estimator $\hat{\sigma}(u)100\sqrt{252}$ at $s = 1$ second with hyperbolic weights, Mandelbrot parameter $a = 26$, with the input prices computed using the Huber & linear filters, shown as annualized volatility in percent on a log10 scale. Top: 16 October 2024, bottom: 12 days.

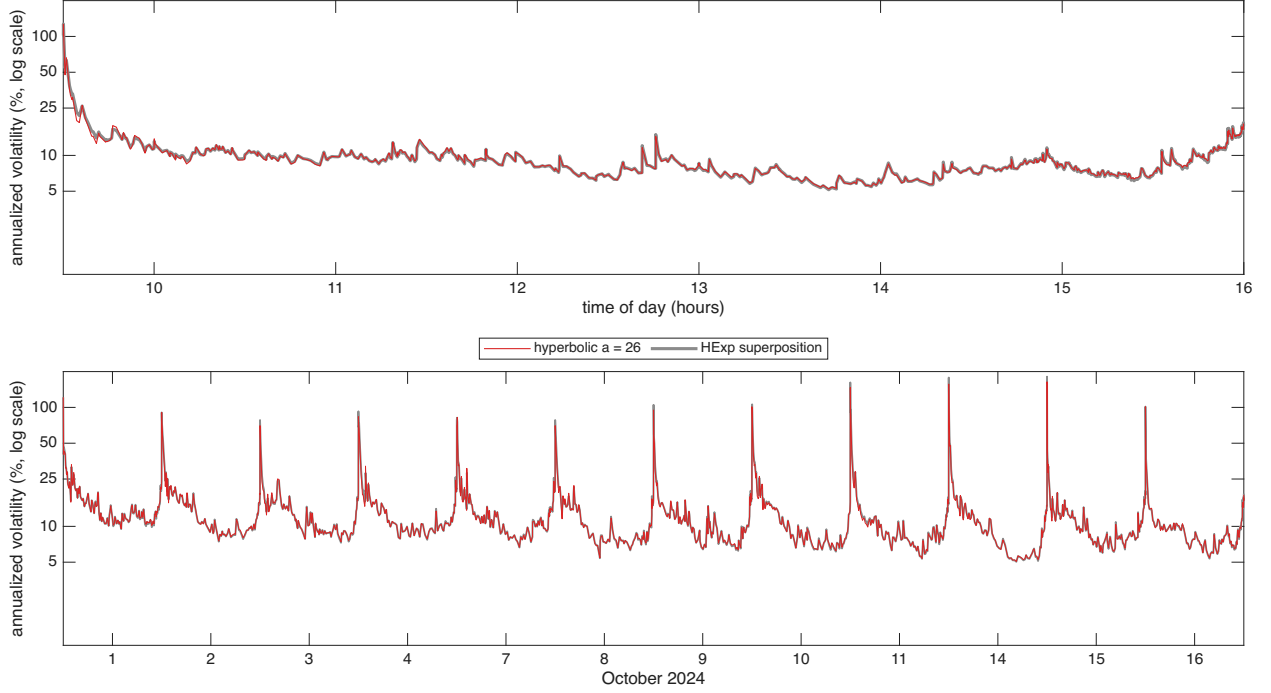


Figure 6: Hyperbolic against superposition weights for **AMGN** over 12 trading days in Oct 2024, the diurnally adjusted $\hat{\sigma}(u)100\sqrt{252}$ at $s = 1$ second from the Huber filter, shown as annualized vol in % on a log10 scale. The only difference between the 2 paths is the weight function: the hyperbolic weights with $a = 26$ in red, drawn on top, and the **HExp** superposition in grey, 4 exponential components with half lives of 10, 100, 1000, 10000 seconds. Hyperparameters minimize the **QLIKE** objective. Top: 16 October 2024, bottom: 12 days.

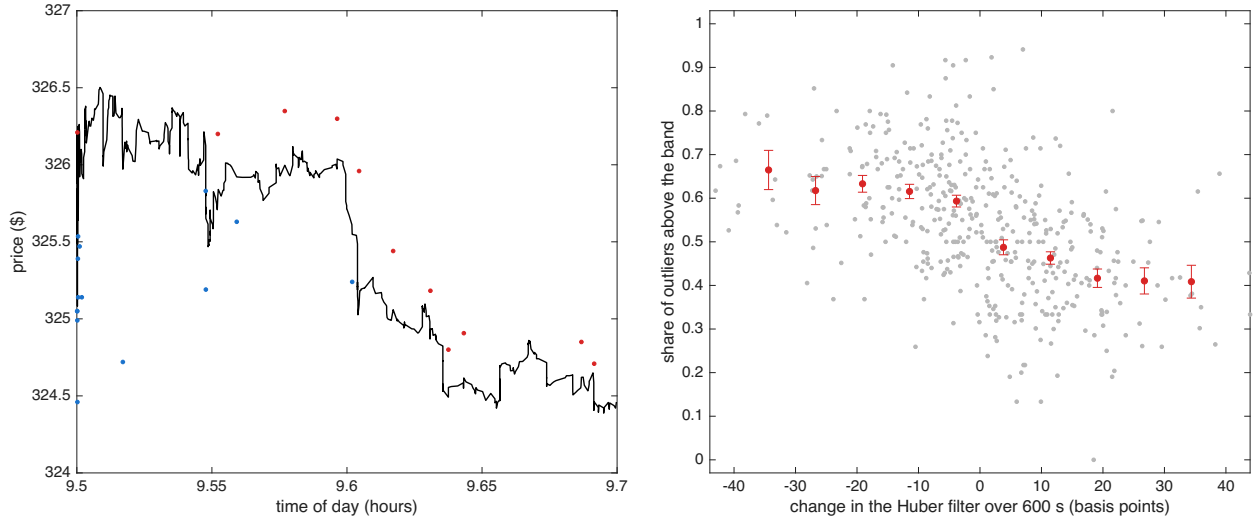


Figure 7: Outliers & robust price for **AMGN** on 16 October 2024. Left: the 12 minutes with the largest move in the Huber filter that day; outliers above $Y_t - \theta_t > \delta_{t-1}$ in red, outliers below $Y_t - \theta_t < -\delta_{t-1}$ in blue, Huber filter in black. Right: over the 12 trading days, the 600 second empirical conditional probability that outliers are above (rather than below) the Huber band against the 600 second change in the Huber filter in basis points: light points are single bins, the line & bars are means & s.e.

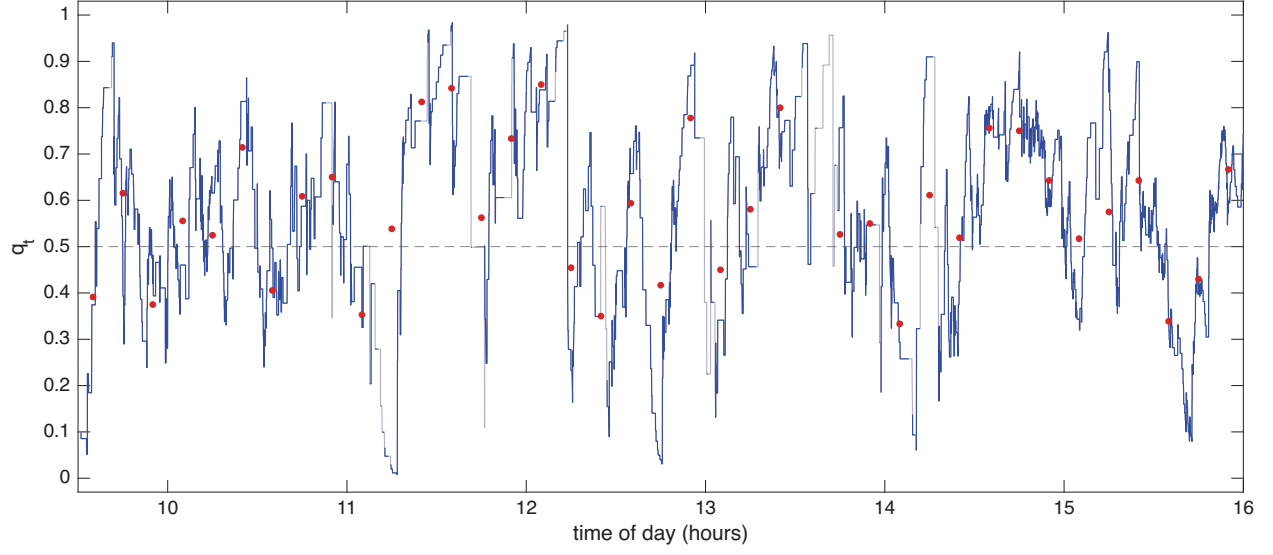


Figure 8: The directional conditional probability for **AMGN**, 16 October 2024. The filtered conditional probability q_t that an outlier lies above the robust Huber band, under exponential weights decaying in clock time with half life of 88 seconds; where fewer than two outliers remain in the weights it is drawn in grey. The dashed line marks 0.5. The red points are the empirical conditional probability using the 600 second bins of the previous figure.

The direction half-life grid was extended beyond its usual end to 300 seconds, because the log-likelihood was still rising there.

On 14 October 2024, 28 per cent of the day's largest one per cent of residuals fall inside its first minute, against at most 22 per cent on any other day. Every number that day contributes to carries that burst.

The tail index of the residual cannot be estimated for every 10th trade, on 4 of the 12 days: what the row's mask or thinning leaves is too few residuals for the largest 0.1 to 1 per cent to hold enough order statistics.

Diagnostics.